Valves and Fittings Supplies

# 1 1/2” - 4”

## Stainless Steel Flanged Three Way L Port Ball Valve

## SP3WLANSI

- Three Way Ball Valve
- L Port
- ANSI150

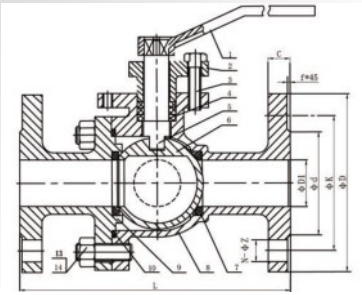

| NO. | PAPT NAME | MATERIAL |
|---|---|---|
| 1 | HANDLE | WCB |
| 2 | BLICK CIRCLE | 65MN |
| 3 | ORIENTATION PATCH | Q235/304 |
| 4 | GLAND | WCB/201 |
| 5 | SCREW | B7/304 |
| 6 | PACKING | PTFE |
| 7 | STEM | 35#/304/316 |
| 10 | BALL | 210/304/316 |
| 11 | SEAT | PTFE/RPTFE |
| 12 | BODY | WCB/CFB/CF8M |
| 13 | BONNRT | WCB/CFB/CF/8M |
| 14 | GASKET | PTFE |
| 15 | NUT | 2H/304 |
| 16 | STUD | B7/304 |

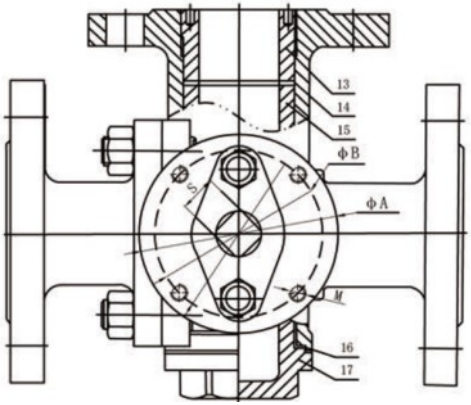


| DN | D1 | d | K | D | f | C | N-ΦZ | L | A | B | S | M |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 12″ | 290 | 381.0 | 431.8 | 485 | 2 | 32.2 | 12-25.5 | 720 | 210 | 165 | | 4-M20 |
| 10″ | 240 | 323.8 | 362.0 | 405 | 2 | 30.6 | 12-25.5 | 670 | 210 | 165 | 34 | 4-M20 |
| 8″ | 190 | 269.9 | 398.5 | 345 | 2 | 29.0 | 8-22 | 550 | 175 | 140 | 32 | 4-M16 |
| 6″ | 145 | 215.9 | 241.3 | 280 | 2 | 25.9 | 8-22 | 440 | 155 | 125 | 28 | 4-M12 |
| 5″ | 119 | 185.7 | 215.9 | 255 | 2 | 24.3 | 8-22 | 380 | 155 | 125 | 24 | 4-M12 |
| 4″ | 95 | 157.2 | 190.5 | 230 | 2 | 24.3 | 8-19 | 320 | 155 | 102 | 22 | 4-M10 |
| 3″ | 75 | 127.0 | 152.4 | 190 | 2 | 19.5 | 4-19 | 280 | 127 | 102 | 19 | 4-M10 |
| 21/2″ | 58 | 104.8 | 139.7 | 180 | 2 | 17.9 | 4-19 | 260 | 127 | 70 | 17 | 4-M8 |
| 2″ | 45 | 92.1 | 120.7 | 150 | 2 | 16.3 | 4-19 | 240 | 92 | 70 | 16 | 4-M8 |
| 11/2″ | 35 | 73.0 | 98.4 | 125 | 2 | 14.7 | 4-16 | 220 | 92 | 70 | 16 | 4-M8 |
| 11/4″ | 28 | 63.5 | 88.9 | 115 | 2 | 13.2 | 4-16 | 200 | 80 | 50 | 14 | 4-M6 |
| 1″ | 24 | 50.8 | 79.4 | 110 | 2 | 11.6 | 4-16 | 180 | 70 | 50 | 12 | 4-M6 |
| 3/4″ | 19 | 42.9 | 69.9 | 100 | 2 | 10.9 | 4-16 | 160 | 70 | 42 | 11 | 4-M5 |
| 1/2″ | 13 | 34.9 | 60.3 | 90 | 2 | 10.0 | 4-16 | 150 | 65 | 42 | 11 | 4-M5 |

Ph: 02 4610 2159 Web: www/.spvalves.com.au Fax: 02 4610 2342