
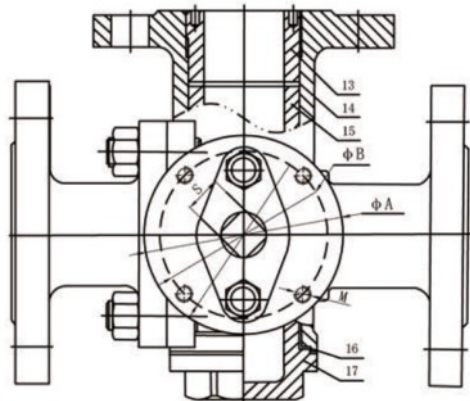


SP3WTANSI

- Three Way Ball Valve
- T Port
- ANSI150



NO.	PAPT NAME	MATERIAL
1	HANDLE	WCB
2	BLICK CIRCLE	65MN
3	ORIENTATION PATCH	Q235/304
4	GLAND	WCB/201
5	SCREW	B7/304
6	PACKING	PTFE
7	STEM	35#/304/316
10	BALL	210/304/316
11	SEAT	PTFE/RPTFE
12	BODY	WCB/CFB/CF8M
13	BONNRT	WCB/CFB/CF/8M
14	GASKET	PTFE
15	NUT	2H/304
16	STUD	B7/304

DN	D ₁	d	K	D	f	C	N-ØZ	L	A	B	S	M
12"	290	381.0	431.8	485	2	32.2	12-25.5	720	210	165		4-M20
10"	240	323.8	362.0	405	2	30.6	12-25.5	670	210	165	34	4-M20
8"	190	269.9	398.5	345	2	29.0	8-22	550	175	140	32	4-M16
6"	145	215.9	241.3	280	2	25.9	8-22	440	155	125	28	4-M12
5"	119	185.7	215.9	255	2	24.3	8-22	380	155	125	24	4-M12
4"	95	157.2	190.5	230	2	24.3	8-19	320	155	102	22	4-M10
3"	75	127.0	152.4	190	2	19.5	4-19	280	127	102	19	4-M10
2 1/2"	58	104.8	139.7	180	2	17.9	4-19	260	127	70	17	4-M8
2"	45	92.1	120.7	150	2	16.3	4-19	240	92	70	16	4-M8
1 1/2"	35	73.0	98.4	125	2	14.7	4-16	220	92	70	16	4-M8
1 1/4"	28	63.5	88.9	115	2	13.2	4-16	200	80	50	14	4-M6
1"	24	50.8	79.4	110	2	11.6	4-16	180	70	50	12	4-M6
3/4"	19	42.9	69.9	100	2	10.9	4-16	160	70	42	11	4-M5
1/2"	13	34.9	60.3	90	2	10.0	4-16	150	65	42	11	4-M5