



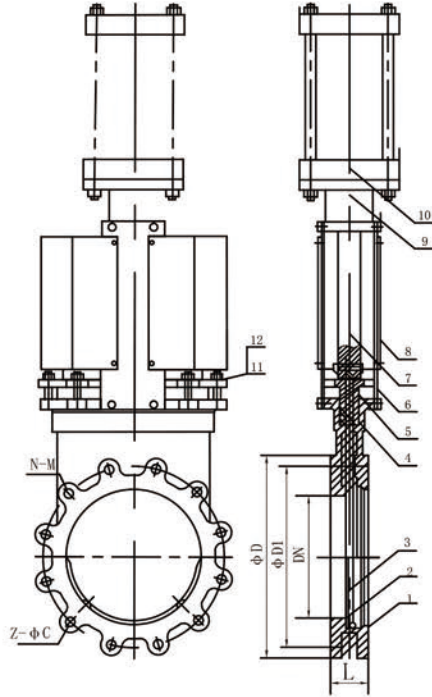

# SPLAKGV ACTUATED

■ 316 S/S

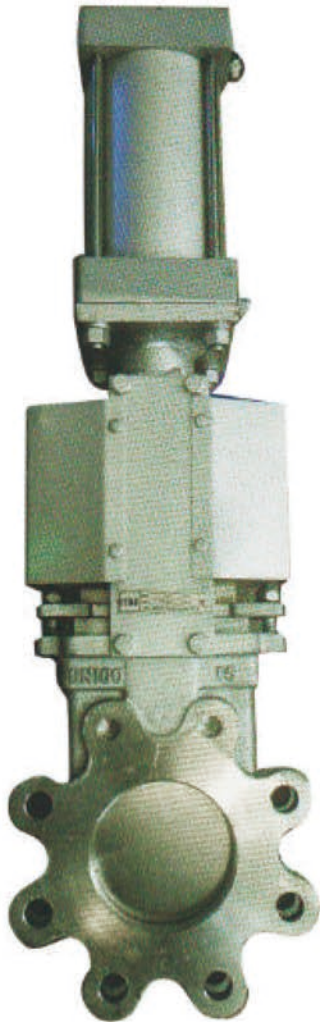

12	Nut	8
11	Bolt	B8
10	Pneumatic Actuator	
9	Yoke	CF8
8	Protecting Cover	Q235
7	Cylinder Piston rod	1045
6	Shoring	Q235
5	Gland	CF8
4	Packing	PTEE
3	Disc	ss316
2	Seat	EPDM
1	Body	CF8
NO.	Name	Material

TECHNICAL REQUIREMENTS					
1. Flange dimensions conform to AS2129 Table e.					
DN	L	D	D1	N-M	Z-φC
4"	43	215	178	2-M16	6-φ 18
6"	52	280	235	2-M20	6-φ 22
8"	61	335	292	2-M20	6-φ 22
10"	61	405	356	4-M20	8-φ 22
12"	67	455	406	4-M24	8-φ 26