



VALVES AND FITTINGS SUPPLIES


# SP LOK SUPERIOR QUALITY FITTINGS

## 316 Stainless Steel Compression Fittings

SEAMLESS TUBE WALL THICKNESS (SWG/INCH)


	Tube OD	22 0.028	20 0.035	18 0.049	16 0.064	14 0.083	12 0.104
Max	1/4"	4000	5000	7500	10200		
Working	3/8"		3300	4800	6500		
Pressure	1/2"		2400	3500	4700	6200	
In	5/8"			2900	4000	5200	6000
PSI	3/4"			2400	3300	4200	4900
	1"				2400	3100	3600

## SPU Straight Connector

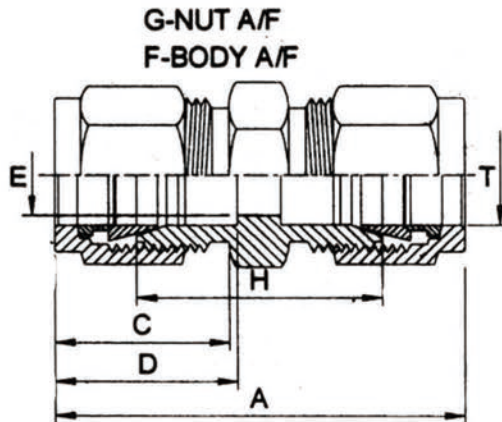

Size Tube OD	Part Number	A	C	D	E Min	F A/F	G A/F	H Body
1/8	SPU2	35.3	15.3	12.7	2.4	11	11	22.2
1/4	SPU4	40.9	17.7	15.3	4.8	12.7	14	26.2
3/8	SPU6	45	19.3	16.8	7	17	17	30.2
1/2	SPU8	51.2	22	22.9	10.4	20.6	22	31
5/8	SPU10	52.3	22	24.6	12.7	24	25	31.8
3/4	SPU12	54	22	24.6	15.8	27	27	33.3
1	SPU16	64.8	26.5	31.2	22.2	36	38	40.4

## SPEU Union Elbow

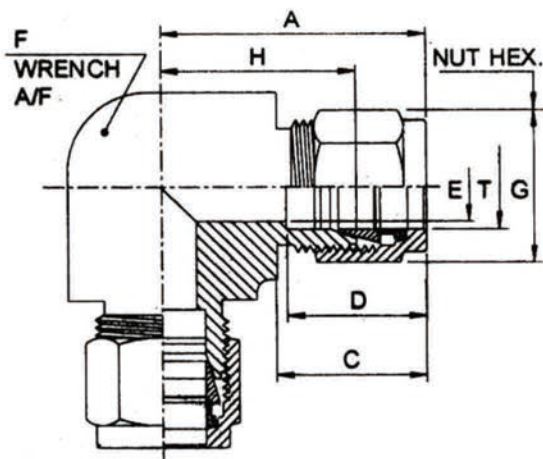

Size Tube OD	Part Number	A	C	D	E Min	F A/F	G A/F	H Body
1/8	SPEU2	22.3	15.3	12.7	2.4	11	11	16.6
1/4	SPEU4	27	17.7	15.3	4.8	12	14	18.3
3/8	SPEU6	30.5	19.3	16.8	7	17	17	21.4
1/2	SPEU8	36	22	23	10.5	22	22	24.6
5/8	SPEU10	38	22	24.6	12.7	25	25	26.1
3/4	SPEU12	39.9	22	24.6	15.8	28.5	28.5	29.4
1	SPEU16	49	26.5	31.2	22.2	38.1	38.1	33.3